
357 South Livingston Avenue • Livingston, New Jersey 07039 Office (973) 535-7950 Fax (973) 535-7989

## **ENGINEERING DEPARTMENT**

## APPLICATION FOR SIDEWALK PERMIT - RESIDENTIAL PROPERTIES

	APPLICATION FOR 5.	IDEWALK FERMITI – KI	ESIDENTIAL PROPERTIES
DATE			
Block:	Lot:	Worksite Address:_	
		10.00 Application Fee & curred and/or replaced, drawn t	rent survey / scaled plot plan indicating all to scale.
Owner in 1	Fee:		Telephone:
Owner Address:			Email:
Contractor:			Telephone:
Contractor Address:			Email:
Dimensions of sidewalk to be repaired / replaced:			Feet (Length)
Driveway Apron to be repaired / replaced:			Feet (Length)
<b>Does this application include a curb cut?*</b> YES			□ NO
<u>*IF</u>	YES – Applicant must subr	mit an Application for Road O	pening Permit
1. The undersigned agrees to abide by all provisions of Chapter 274, Streets and Sidewalks of the Code of the Township of Livingston including §274-14 Maintenance and Repair.			
	2. The undersigned agrees that any sidewalk abutting their property not included in this Sidewalk Permit Applicatio but in poor condition, will also be repaired/replaced.		
3. The Enpoured	. The Engineering Department shall be notified 24 hours in advance for inspection of forms. No concrete is to b poured without proper inspections.		
4. All wor	All work is to be completed in accordance with the attached construction detail, during suitable weather conditions.		
			plication, and agree to perform all work in full of the State of New Jersey in relation thereto.
OWNER/APPLICANT SIGNATURE:			DATE:
DATE PAI	D:		Cash:
APPROVAL, TOWNSHIP ENGINEER:			DATE:
INSPECTED RV:			DATE:

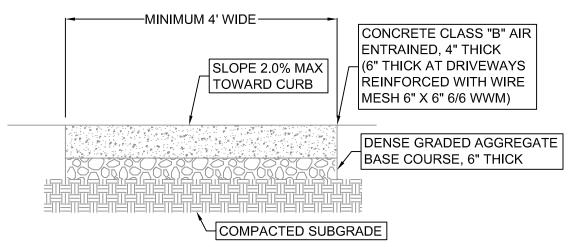

## **NOTES**

- 1. SUBBASE SHALL BE COMPACTED TO THE SATISFACTION OF THE ENGINEER.
- 2. LONGITUDINAL JOINTS, 1/4" WIDE, SHALL BE PROVIDED BETWEEN CURBS AND ABUTTING SIDEWALKS AND SHALL BE FILLED WITH A PREMOLDED BITUMINOUS TYPE JOINT FILLER.
- 3. EXPANSION JOINTS OF 1/2" WIDE BITUMINOUS CELLULAR TYPE JOINT FILLER WILL BE PROVIDED EVERY 12'.
- 4. TRANSVERSE SURFACE GROOVES SHALL BE CUT IN SIDEWALKS BETWEEN EXPANSION JOINTS AT INTERVALS EQUAL TO THE SIDEWALK WIDTH.
- 5. ALL JOINTS AND EDGES ARE TO BE TOOLED.
- 6. SURFACE SHALL BE BRUSHED TRANSVERSELY TO A NEAT FINISH.
- 7. STANDARD CONCRETE SIDEWALK MEETS NJDOT STANDARDS.

## CONCRETE SIDEWALK N.T.S.

CONCRETE SIDEWALK
CONSTRUCTION DETAIL FOR THE TOWNSHIP OF LIVINGSTON
LAST UPDATED: 7-23-2013